

Command Switch

Feature



- The emergency stop pushbuttons employ FUJI's original Trigger Action mechanism.
- They are suitable for emergency stop and safety. This mechanism prevents the contacts from moving until the button is pushed and locked.
- Provided with a Trigger Action mechanism conforming to EN418
- Provided with direct opening action (approved by TUV) conforming to EN60947-5-1 and EN60947-5-5

Pushbutton Switches 22 mm./30 mm. dia



Operator		Action type	Contact	Ordering code	Botton Color	Unit Price (THB)
Flush round head	22 mm.	Momentary	1NO	AR22F0R10_	R,G,W,Y,B	300.-
			1NC	AR22F0R01_	R,G,W,Y,B	300.-
			1NO+1NC	AR22F0R11_	R,G,W,Y,B	410.-
	30 mm.	Momentary	1NO	AR30F0R10_	R,G,W,Y,B	โปรดสอบถาม
			1NC	AR30F0R01_	R,G,W,Y,B	โปรดสอบถาม
			1NO+1NC	AR30F0R11_	R,G,W,Y,B	โปรดสอบถาม
Extended round head	22 mm.	Momentary	1NO	AR22E0R10_	R,G,W,Y,B	300.-
			1NC	AR22E0R01_	R,G,W,Y,B	300.-
			1NO+1NC	AR22E0R11_	R,G,W,Y,B	โปรดสอบถาม
	30 mm.	Momentary	1NO	AR30E0R10_	R,G,W,Y,B	350.-
			1NC	AR30E0R01_	R,G,W,Y,B	350.-
			1NO+1NC	AR30E0R11_	R,G,W,Y,B	460.-
Mushroom head	22 mm.	Momentary	1NO	AR22M0R10_	R,G	โปรดสอบถาม
			1NC	AR22M0R01_	R,G	โปรดสอบถาม
			1NO+1NC	AR22M0R11_	R,G	โปรดสอบถาม
	30 mm.	Momentary	1NO	AR30M0R10_	R,G	โปรดสอบถาม
			1NC	AR30M0R01_	R,G	โปรดสอบถาม
			1NO+1NC	AR30M0R11_	R,G	โปรดสอบถาม
Giant head	30 mm.	Momentary	1NO	AR30B0R10_	R	โปรดสอบถาม
			1NC	AR30B0R01_	R	โปรดสอบถาม
			1NO+1NC	AR30B0R11_	R	โปรดสอบถาม

Emergency stop pushbutton Switches 22mm./30mm. Dia

Operator		Action type	Contact	Ordering code	Botton Color	Unit Price (THB)
Flush round head	22 mm.	Push-lock, turn-reset (Head 40mm dia.)	1NO	AR22V2R10_	R,G,W,Y,B	1,040.-
			1NC	AR22V2R01_	R,G,W,Y,B	1,040.-
			1NO+1NC	AR22V2R11_	R,G,W,Y,B	1,150.-
	30 mm.	Push-lock, turn-reset (Head 40mm dia.)	1NO	AR30V2R10_	R,G,W,Y,B	1,100.-
			1NC	AR30V2R01_	R,G,W,Y,B	1,100.-
			1NO+1NC	AR30V2R11_	R,G,W,Y,B	1,210.-





- Prices are not included VAT
- Prices are subjected to change without notice

Illuminated pushbutton Switches 22 mm./30 mm. dia



Operator		Action type	Lamp Voltage	Contact	Ordering code	Lens Color	Unit Price (THB)
Extended round head	22mm. (Incandescent lamp) Lamp Base : BA9S 	Momentary	24V AC/DC (without transformer)	1NO	AR22E0L10E4_	R,G,W,Y,S	โปรดสอบถาม
				1NC	AR22E0L01E4_	R,G,W,Y,S	โปรดสอบถาม
				1NO+1NC	AR22E0L11E4_	R,G,W,Y,S	โปรดสอบถาม
			200-220V AC (with transformer) Lamp : 6.3V	1NO	AR22E0L10M4_	R,G,W,Y,S	โปรดสอบถาม
				1NC	AR22E0L01M4_	R,G,W,Y,S	โปรดสอบถาม
				1NO+1NC	AR22E0L11M4_	R,G,W,Y,S	โปรดสอบถาม
	30mm. (Incandescent lamp) Lamp Base : BA9S 	Momentary	24V AC/DC (without transformer)	1NO	AR30E0L10E4_	R,G,W,Y,S	680.-
				1NC	AR30E0L01E4_	R,G,W,Y,S	680.-
				1NO+1NC	AR30E0L11E4_	R,G,W,Y,S	790.-
			200-220V AC (with transformer) Lamp : 6.3V	1NO	AR30E0L10M4_	R,G,W,Y,S	940.-
				1NC	AR30E0L01M4_	R,G,W,Y,S	940.-
				1NO+1NC	AR30E0L11M4_	R,G,W,Y,S	1,050.-
Extended with transparent full guard (24mm. dia.)	22mm. (Incandescent lamp) Lamp Base : BA9S 	Momentary	24V AC/DC (without transformer)	1NO	AR22G4L10E4_	R,G,W,Y,S	โปรดสอบถาม
				1NC	AR22G4L01E4_	R,G,W,Y,S	โปรดสอบถาม
				1NO+1NC	AR22G4L11E4_	R,G,W,Y,S	โปรดสอบถาม
			200-220V AC (with transformer) Lamp : 6.3V	1NO	AR22G4L10M4_	R,G,W,Y,S	910.-
				1NC	AR22G4L01M4_	R,G,W,Y,S	910.-
				1NO+1NC	AR22G4L11M4_	R,G,W,Y,S	1,020.-
Extended with full guard (24mm dia.)	30mm. (Incandescent lamp) Lamp Base : BA9S 	Momentary (Normal guard)	24V AC/DC (without transformer)	1NO	AR30G3L10E4_	R,G,W,Y,S	โปรดสอบถาม
				1NC	AR30G3L01E4_	R,G,W,Y,S	โปรดสอบถาม
				1NO+1NC	AR30G3L11E4_	R,G,W,Y,S	โปรดสอบถาม
			200-220V AC (with transformer) Lamp : 6.3V	1NO	AR30G3L10M4_	R,G,W,Y,S	1,160.-
				1NC	AR30G3L01M4_	R,G,W,Y,S	1,160.-
				1NO+1NC	AR30G3L11M4_	R,G,W,Y,S	1,270.-

- Prices are not included VAT
- Prices are subjected to change without notice



Selector Switches 22mm./30mm. Dia

Operator		Action type	Contact	Ordering code	Knob Color	Unit Price (THB)
Knob	22mm. 	2-position, maintained	1NO+1NC	AR22PR-211_	B	โปรดสอบถาม
		3-position, maintained	1NO+1NC	AR22PR-311_	B	โปรดสอบถาม
		3-position, spring return	2NO+2NC	AR22PR-122_	B	1,100.-
	30mm. 	2-position, maintained	1NO+1NC	AR30PR-211	B	โปรดสอบถาม
		3-position, maintained	1NO+1NC	AR30PR-311_	B	โปรดสอบถาม
		3-position, spring return	2NO+2NC	AR30PR-122_	B	1,120.-
Lever	22mm. 	2-position, maintained	1NO+1NC	AR22WR-211_	B	โปรดสอบถาม
		3-position, maintained	1NO+1NC	AR22WR-311_	B	โปรดสอบถาม
	30mm. 	2-position, maintained	1NO+1NC	AR30WR-211_	B	โปรดสอบถาม
		3-position, maintained	1NO+1NC	AR30WR-311_	B	โปรดสอบถาม

Illuminated Selector Switches 22mm./30mm. dia.

Operator		Action type	Lamp Voltage	Contact	Ordering code	Lens Color	Unit Price (THB)
Knob	22mm. (Incandescent lamp) Lamp Base : BA9S 	2-position, maintained	200-220V AC (with transformer)	1NO+1NC	AR22PL-211M4_	R,G	โปรดสอบถาม
		3-position, maintained	Lamp : 6.3V	1NO+1NC	AR22PL-311M4_	R,G	โปรดสอบถาม
	30mm. (Incandescent lamp) Lamp Base : BA9S 	2-position, maintained	200-220V AC (with transformer)	1NO+1NC	AR30PL-211M4_	R,G	โปรดสอบถาม
		3-position, maintained	Lamp : 6.3V	1NO+1NC	AR30PL-311M4_	R,G	โปรดสอบถาม

Key Switches 22mm./30mm. Dia


Operator		Action type	Contact	Ordering code	Key removable position	Unit Price (THB)
Cylinder key	22mm. 	2-position, maintained	1NO+1NC	AR22JR-2A11A	Left	โปรดสอบถาม
		3-position, maintained	1NO+1NC	AR22JR-3A11A	Left	โปรดสอบถาม
	30mm. 	2-position, maintained	1NO+1NC	AR30JR-2A11A	Left	โปรดสอบถาม
		3-position, maintained	1NO+1NC	AR30JR-3A11A	Left	โปรดสอบถาม

- Prices are not included VAT
- Prices are subjected to change without notice

Pilot light 22mm./30mm. Dia

Operator		Lamp Base	Lamp Voltage	Ordering code	Lens Color	Unit Price (THB)
Dome	22mm. (Incandescent lamp) 	BA9S	24V AC/DC (without transformer)	DR22D0L-E4_	A,R,G,W,Y,S	340.-
		BA9S (Lamp : 6.3V)	200-220V AC (with transformer)	DR22D0L-M4_	A,R,G,W,Y,S	810.-
	30mm. (Incandescent lamp) 	BA9S	24V AC/DC (without transformer)	DR30D0L-E4_	A,R,G,W,Y,S	360.-
		BA9S (Lamp : 6.3V)	200-220V AC (with transformer)	DR30D0L-M4_	A,R,G,W,Y,S	820.-
Faceted	30mm. (Incandescent lamp) 	BA9S (Lamp : 6.3V)	200-220V AC (with transformer)	DR30K0L-M4_	A,R,G,W,Y,S	โปรดสอบถาม
Flush square (Transparent lens)	22mm. (Incandescent lamp) 	BA9S (Lamp : 6.3V)	200-220V AC (with transformer)	DR22F4M-M4_	A,R,G,W,Y,S	580.-
Extended square	22mm. (Incandescent lamp) 	BA9S (Lamp : 6.3V)	200-220V AC (with transformer)	DR22E3M-M4_	A,R,G,W,Y,S	โปรดสอบถาม

Accessories for AR22 Series, AR30 Series

Operator	Specifications	Contact	Ordering code	Body Color	Unit Price (THB)
Contact Block	 AC15 : 6A	1NO	AR9B290	Blue	โปรดสอบถาม
	 AC15 : 6A	1NC	AR9B291	Red	โปรดสอบถาม

- Prices are not included VAT
- Prices are subjected to change without notice

BW GLOBAL - TWIN Series

Feature

- Complies with major international standards and certifications. (IEC,JIS,CE,TUV,CCC)
- High performance and compact design breaker by FUJI's ingenious ablation breaking technology.
- Providing better user friendliness by the standardization of internal accessory parts. (32/50/63/100AF, 125/250AF, 400/630/800AF)
- Material description of major components, compliance with RoHS Directive, and lower environmental impact by Cadmium-free contact. (subject to some exceptions.)



MOLDED CASE CIRCUIT BREAKER <"Global Twin Series">

FRAME	TYPE	INTERRUPTING CAPACITY (kA)		RATED CURRENT	Unit Price (THB) POLES			ACCESSORIES Unit Price (THB)			
		230VAC	400VAC		2P	3P	4P	AUX. Sw. (W)	Alarm (K)	Shunt (F)	UVT (R)
32	BW32AAG-△ P□	2.5	1.5	3, 5, 10, 15, 20, 30,32	805	1,155	-	720	720	-	-
	BW32SAG-△ P□	5	2.5	3, 5, 10, 15, 20, 30,32	1,065	1,530	-	720	720	670	-
50	BW50AAG-△ P□	2.5	1.5	5, 10, 15, 20, 30, 32, 40, 50	1,020	1,465	-	720	720	1,070	3,410
	BW50EAG-△ P□	5	2.5	5, 10, 15, 20, 30, 32, 40, 50	1,175	1,685	-	720	720	1,070	3,410
	BW50SAG-△ P□	10	7.5	5, 10, 15, 20, 30, 32, 40, 50	1,350	1,935	-	720	720	1,070	3,410
	BW50RAG-△ P□	25	10	10, 15, 20, 30, 32, 40, 50	1,520	2,185	-	720	720	1,070	3,410
	BW50HAG-△ P□	125	65	15, 20, 30, 40, 50	5,530	6,050	-	820	820	1,070	3,410
63	BW63EAG-△ P□	5	2.5	60, 63	1,290	1,855	-	720	720	1,070	3,410
	BW63SAG-△ P□	10	7.5	60, 63	1,485	2,130	-	720	720	1,070	3,410
	BW63RAG-△ P□	25	15	60, 63	1,600	2,305	-	720	720	1,070	3,410
100	BW100AAG-△ P□	5	1.5	60, 63, 75, 100	1,290	1,855	-	820	820	1,700	3,410
	BW100EAG-△ P□	25	10	50, 60, 63, 75, 100	2,280	3,275	-	820	820	1,700	3,410
125	BW125JAG-△ P□	50	30	15,20,30,40,50,60,75,100,125	2,975	4,265	5,560	810	810	1,920	4,260
	BW125SAG-△ P□-CE	85	36	15,20,30,40,50,60,75,100,125	3,475	4,960	6,550	810	810	1,920	4,260
	BW125RAG-△ P□	100	50	15,20,30,40,50,60,75,100,125	5,460	7,545	9,925	810	810	1,920	4,260
	BW125HAG-△ P□	125	65	15,20,30,40,50,60,75,100,125	6,915	9,555	-	820	820	1,920	4,260
160	BW160EAG-△ P□-O	36	18	125, 150, 160	5,820	6,800	-	940	940	1,920	4,260
	BW160JAG-△ P□-O	50	30	125, 150, 160	6,470	8,700	11,000	940	940	1,920	4,260
	BW160SAG-△ P□-O	85	36	125, 150, 160	6,850	9,130	11,910	940	940	1,920	4,260
	BW160RAG-△ P□-O	100	50	125, 150, 160	6,945	9,925	12,900	940	940	1,920	4,260
250	BW250EAG-△ P□	36	18	175, 200, 225, 250	6,115	7,140	-	940	940	1,920	4,260
	BW250JAG-△ P□	50	30	175, 200, 225, 250	6,790	9,200	11,500	940	940	1,920	4,260
	BW250SAG-△ P□	85	36	175, 200, 225, 250	7,000	9,800	12,405	940	940	1,920	4,260
	BW250RAG-△ P□	100	50	175, 200, 225, 250	7,940	11,415	14,390	940	940	1,920	4,260
	BW250HAG-△ P□	125	65	125,150, 160, 175, 200, 225, 250	8,770	11,985	-	940	940	1,920	4,260
400	BW400EAG-△ P□	50	30	250, 300, 350, 400	9,945	14,210	-	1,180	1,180	2,340	4,260
	BW400SAG-△ P□	85	36	250, 300, 350, 400	10,720	14,800	-	1,180	1,180	2,340	4,260
	BW400RAG-△ P□	100	50	250, 300, 350, 400	13,265	15,630	21,030	1,180	1,180	2,340	4,260
	BW400HAG-△ P□	125	70	250, 300, 350, 400	15,160	18,945	25,580	1,180	1,180	2,340	4,260
630	BW630EAG-△ P□	50	36	500, 600, 630	-	22,825	-	1,180	1,180	2,340	4,260
	BW630RAG-△ P□	100	50	500, 600, 630	-	24,400	32,125	1,180	1,180	2,340	4,260
	BW630HAG-△ P□	125	70	500, 600, 630	-	37,895	51,610	1,180	1,180	2,340	4,260
800	BW800EAG-△ P□	50	36	700, 800	-	37,715	-	1,180	1,180	2,340	4,260
	BW800RAG-△ P□	100	50	700, 800	-	40,690	57,270	1,180	1,180	2,340	4,260
	BW800HAG-△ P□	125	70	700, 800	-	53,055	71,620	1,180	1,180	2,340	4,260

NOTE : △ = Poles (2P, 3P, 4P) □ = Rated Current (AT)

- Prices are not included VAT
- Prices are subjected to change without notice

SW Series

Magnetic Contactors and Overload Relay



Feature

- Can be controlled remotely instead of manual switch.
- Safety in control and maintenance.
- Accuracy
- Motor protection in case lack of phase

SW Model	Max motor Capacity (kW)		Combination Between	Aux. Con.		*Coil Voltage					Unit Price (THB)
	200-220V	380-440V		NO	NC	24V	48V	120V	240V	400V	
SW-03/3H	2.5	4	SC-03 + TR- ON/3	1	-	x	x	x	x	x	1,190
SW-0/3H	3.5	5.5	SC-0 + TR - ON/3	1	-	x	x	x	x	x	1,400
SW-05/3H	3.5	5.5	SC-05 + TR - ON/3	1	1	x	x	x	x	x	1,600
SW-4-0/3H	4.5	7.5	SC-4-0 + TR -5-1N/3	1	-	x	x	x	x	x	1,945
SW-4-1/3H	5.5	11	SC-4-1 + TR -5-1N/3	1	-	x	x	x	x	x	2,115
SW-5-1/3H	5.5	11	SC-5-1 + TR -5-1N/3	1	1	x	x	x	x	x	2,090
SW-N1/3H	7.5	15	SC-N1 + TR- N2/3	2	2	x	x	x	x	x	2,935
SW-N2/3H	11	18.5	SC-N2 + TR- N2/3	2	2	x	x	x	x	x	3,440
SW-N2S/3H	15	22	SC-N2S + TR- N3/3	2	2	x	x	x	x	x	4,475
SW-N3/3H	18.5	30	SC-N3 + TR- N3/3	2	2	x	x	x	x	x	5,170
SW-N4/3H	22	40	SC-N4 + TR- N5/3	2	2	x	x	x	x	x	7,625
SW-N5A/3H	30	55	SC-N5A + TR- N5/3	2	2	x	x	x	x	x	8,970
SW-N6/3H	37	60	SC-N6 + TR- N6/3	2	2	o	o	o	o	x	11,805
SW-N7/3H	45	75	SC-N7 + TR- N7/3	2	2	o	o	o	o	x	16,860
SW-N8/3H	55	90	SC-N8 + TR- N8/3	2	2	o	o	o	o	x	19,060
SW-N10/3H	65	110	SC-N10 + TR- N10/3	2	2	o	o	o	o	x	27,455
SW-N11/3H	90	160	SC-N11 + TR- N2/3	2	2	o	o	o	o	x	36,520
SW-N12/3H	120	220	SC-N12 + TR- N12/3	2	2	o	o	o	o	x	49,385
SW-N14/3H	180	315	SC-N14 + TR- N14/3	2	2	o	o	o	o	x	93,965

NOTE : *X : Coil operating voltage AC
 O : Coil operating voltage both AC or DC

- Prices are not included VAT
- Prices are subjected to change without notice

SC Series

Magnetic Contractor 3 phase



Feature

- Electrical life: 2,000,000 operations (SC-N3 or smaller)
- Bifurcated auxiliary contacts for greater reliability
- Compliance with international standards (UL, CSA, IEC, LR, BV, etc)
- Easier to use (structured to enable easy coil replacement)
- High operating reliability due to a super magnet with built-in IC (SC-N6 or larger)
(Prevents coil burning due to voltage fluctuations and contact fusing due to floppy operation; enables using the same coils for AC/DC, increase the range, reduces switching noise, etc)
- Mirror contacts are a standard feature
- A wide range of options

SC Model	AC3, IE947-4-1		Rated Operational Current (A)		Auxiliary Contact		*Coil Voltage					Unit Price (THB)
	200-220V	380-440V	200-220V	380-440V	NO	NC	24V	48V	120V	240V	400V	
	SC-03	2.5	4	11	9	1	-	x	x	x	x	
SC-0	3.5	5.5	13	12	1	-	x	x	x	x	x	720
SC-05	3.5	5.5	13	12	1	1	x	x	x	x	x	890
SC-4-0	4.5	7.5	18	16	1	-	x	x	x	x	x	1,065
SC-4-1	5.5	11	22	22	1	-	x	x	x	x	x	1,235
SC-5-1	5.5	11	22	22	1	1	x	x	x	x	x	1,295
SC-N1	7.5	15	32	32	2	2	x	x	x	x	x	1,875
SC-N2	11	18.5	40	40	2	2	x	x	x	x	x	2,545
SC-N2S	15	22	50	50	2	2	x	x	x	x	x	3,125
SC-N3	18.5	30	65	65	2	2	x	x	x	x	x	3,820
SC-N4	22	40	80	80	2	2	x	x	x	x	x	5,440
SC-N5A	30	55	105	105	2	2	x	x	x	x	x	5,720
SC-N6	37	60	125	125	2	2	o	o	o	o	x	8,455
SC-N7	45	75	150	150	2	2	o	o	o	o	x	12,160
SC-N8	55	90	180	180	2	2	o	o	o	o	x	14,010
SC-N10	65	110	220	220	2	2	o	o	o	o	x	18,875
SC-N11	90	160	300	300	2	2	o	o	o	o	x	25,115
SC-N12	120	220	400	400	2	2	o	o	o	o	x	37,285
SC-N14	180	315	600	600	2	2	o	o	o	o	x	78,965
SC-N16	220	400	800	800	2	2	o	o	o	o	x	114,630

NOTE : *X : Coil operating voltage AC
 O : Coil operating voltage both AC or DC

- Prices are not included VAT
- Prices are subjected to change without notice

TR Series

Thermal Overload Relay 3 element



Feature


- There is STOP-TEST button to test yourself
- Manual/Auto reset
- Contact with 1NO+1NC

TR Model	Used with SC type	Thermal overload Setting range (A)	Unit Price (THB)
TR-0N/3	SC-03	0.1-0.15/0.15-0.24/0.24-0.36/0.36-0.54/0.48-0.72 /0.64-0.96/0.8-1.2/0.95-1.45/1.4-2.2/1.7-2.6 /2.2-3.4/2.8-4.2/4-6/5-8/6-9/7-11	850
	SC-0/SC-05	0.1-0.15/0.15-0.24/0.24-0.36/0.36-0.54/0.48-0.72 /0.64-0.96/0.8-1.2/0.95-1.45/1.4-2.2/1.7-2.6 /2.2-3.4/2.8-4.2/4-6/5-8/6-9/7-11/9-13	
TR-5-1N/3	SC-4-0	0.1-0.15/0.15-0.24/0.24-0.36/0.36-0.54/0.48-0.72 /0.64-0.96/0.8-1.2/0.95-1.45/1.4-2.2/1.7-2.6 /2.2-3.4/2.8-4.2/4-6/5-8/6-9/7-11/9-13/12-18/16-22	880
	SC-4-1		
	SC-5-1		
TR-N2/3	SC-N1	4-6/5-8/6-9/7-11/9-13/12-18/18-26/24-36	1,060
	SC-N2	4-6/5-8/6-9/7-11/9-13/12-18/18-26/24-36/32-42	
TR-N3/3	SC-N2S	7-11/9-13/12-18/18-26/24-36/28-40/34-50/45-65	1,350
	SC-N3	7-11/9-13/12-18/18-26/24-36/28-40/34-50/45-65/48-68	
TR-N5/3	SC-N4	18-26/24-36/28-40/34-50/45-65/53-80	3,250
	SC-N5A	18-26/24-36/28-40/34-50/45-65/53-80/65-95/85-105	
TR-N6/3	SC-N6	45-65/53-80/65-95/85-125	3,350
TR-N7/3	SC-N7	45-65/53-80/65-95/85-125/110-160	4,700
TR-N8/3	SC-N8	65-95/85-125/110-160/125-185	5,050
TR-N10/3	SC-N10	85-125/110-160/125-185/160-240	8,580
TR-N12/3	SC-N11	110-160/125-185/160-240/200-300	12,100
	SC-N12	160-240/200-300/240-360/300-450	
TR-N14/3	SC-N14	240-360/300-450/400-600	15,000

- Prices are not included VAT
- Prices are subjected to change without notice

SC Series

Optional Unit for Magnetic Contactor (SC - 03 - SC - 5 - 1) and (N1 - N3)

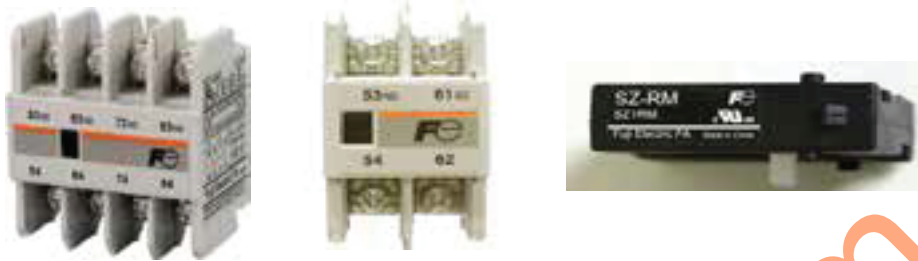

Optional Unit		Type	Contact Arrangement	Unit Price (THB)
Auxiliary Contact Block	Front Mounting	SZ A11	1NO + 1NC	305
		SZ A20	2NO	305
		SZ A22	2NO + 2NC	470
		SZ A40	4NO	470
	Side Mounting	SZ AS1	◆ 1NO + 1NC	สอบถามราคา
		SZ AS2	1NO + 1NC	สอบถามราคา
Mechanical Interlock		SZ RM		470

SRC and SH series Industrial Relay 3 phase



Industrial Relay Model	Related Thermal Current (A)	Contact Arrangement		Rated Voltage (V)	Coil Voltage		Unit Price (THB)
		NO	NC		220V	380V	
SH 4/4	10	2	2	550	X	X	สอบถามราคา
SH 4/8	10	4	4	550	X	X	สอบถามราคา
SH 5/5	10	3	2	550	X	X	สอบถามราคา

- Please do not used auxiliary contact front mounting type and side mounting type at the same time
- Prices are not included VAT
- Prices are subjected to change without notice